# 

Mode 2:Internal Powering

# Mode 1:External Powering



- 1. Powe Input Port

### Ehanced Magnetic Base

Specification

Function: Single Flashing, Dual Flashing, Rotating Lens Material: PC
Base Material: PC Input Voltage Light Source:SMD3535, 12pcs

Working Temperature: -20°C ~ 50°C

Waterproof: IP65














## 3. Operation Instruction (Manual Control)

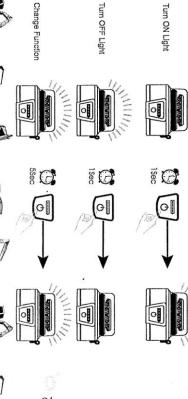



Battery Status Display

Accessories

- 2. ON/OFF Switich /Function Switch
- Charging Port
- 4. Ehanced Magnetic Base

#### 2. Specification Input Voltage: DC9~30V

Charging time: 5-6Hours Function: Single Flashing, Dual Flashing, Rotating Battery: Lithium battery 18650, 7.4V/4400MA Light Source:SMD3535, 12pcs


Discharging time: Single Flashing-5Hours

Dual Flashing-5Hours Rotating-7Hours


Lens Material: PC Base Material: PC Waterproof: IP65


Working Temperature: -20°C ~ 50°C

## 3.Operation Instruction (Remote Control)

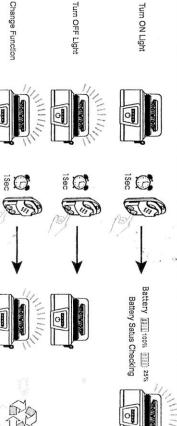

#### 4. Charging

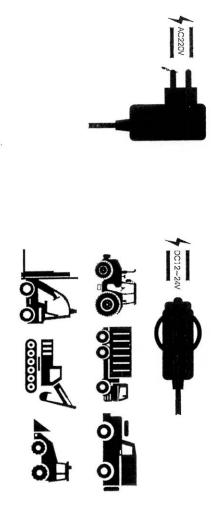




Powered by battery on vehicles

Powered by internal battery of light Used for emergency only

- Fully charge bettery before use
- Checck the bettery life before use
- 3. Checck light if working correctly before use
- 4. Charge the bettery every 6month if not in use
- 5. Check light regularly when use for long hours
- 6. The beacon meet the R65 standard of E-mark only when it 's powered by car battery power. we strongly recommend that use the beacon under lawful conditions. The beacon is used for emergency situation when it is power by internal battery,

# One light can match 2remotes Maximum












### Matching Process


When you do the process ,please make sure the light and the romote in signal communicate range When you do the process ,please make sure the battery of the light has enough battery





Press "ON/OFF" 5times Continuously Within 2.5Sec

The green light of the battery indicator with light up for 30seconds





During This period ,Press any button of the Remote once , the matching process will be completed, iThen the green light extinguish